# AAECU-EOL

## AlarmLine II Analogue EN LHD Replacement Part – EOL module

### General

The AAECU-EOL is a replacement End-Of-Line unit for use with the AlarmLine II Analogue EN Liner Heat Detection (LHD) cable control unit. The AAECU control unit is supplied with an AAECU-EOL included, but in case the unit is lost or damaged then the AAECU-EOL can be supplied separately.




### Details

- VdS EN54-22:2015/prA1:2007

# AAECU-EOL

## AlarmLine II Analogue EN LHD Replacement Part – EOL module

## Technical specifications

### Physical

| | |
|---|---|
| Physical dimensions | 100 x 35 x 60 mm (W x H x D)<br>4" x 1 3/8" x 2 3/8" (W x H x D) |
| Net weight | 115 g |
| Mounting type | Surface mount |
| Material (body) | Aluminium |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Operating temperature | -40 to +125°C |
| Relative humidity | 0 to 99% ambient temperature -40 to +40°C /<br>0 to 75% ambient temperature greater than +40°C |
| IP rating | IP65 |

### Regulatory

| | |
|---|---|
| Certification | CE, EN54-22, VdS |

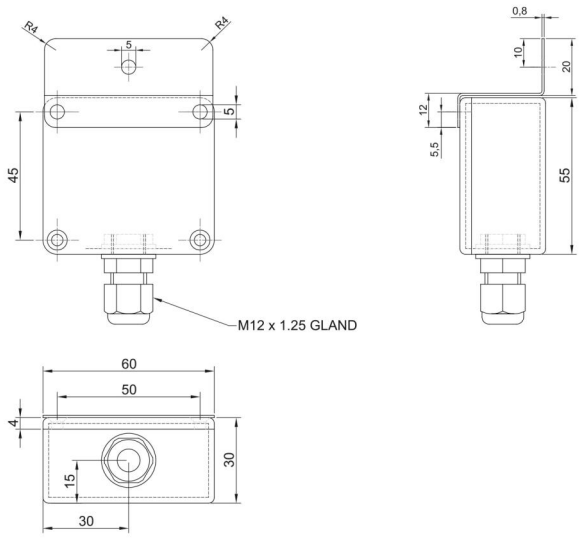



*Figure 3. AlarmLine II Analogue EN EOL unit Dimensional Drawing*

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 3 February 2025 - 15:43