SMA-LP-MULTI

MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE



SMA-LP-MULTI

MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE

Technische specificaties

System

RTE (Request To Exit)	No
CSN (Card Serial Number)	Yes
Custom data model	Yes

Technology

Reader type	Biometrisch
Reader operating-transmitting frequency	13.56 MHz
Supported technology 13.56 MHz	MIFARE Classic (CSN), MIFARE Classic (benutzerdefinierte Daten), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (benutzerdefinierte Daten), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, Level und 3), NFC (CSN)
SAM module embedded	No

Biometric

Biometric type	Fingerabdruck
Biometric sensor type	Optisch

Interface & connections

Interface	Ethernet, OSDP V2, OSDP V2 Sicherer Kanal, RS-485, USB, Wiegand
Connector type	Netzwerk, Zopf

Tamper type

Pry-off tamper	No
Opening tamper	Yes

Operation

Stand-alone	Yes
PIN keypad	Yes

Electrical

Power supply type	PoE-Eingang

Physical

Colour	Schwarz
Material	Polycarbonat
Form factor	Überdimensioniert
Mounting type	Oberflächenmontage

Environmental

Vandal proof	No
Environment	Draussen

Regulatory

Compliancy	CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE

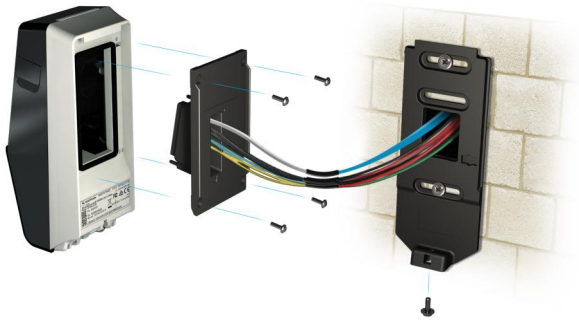

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57