ACL800SUW-BCMF-S

ACL800 Biometric Capacitive with MIFARE reader - Fingerprint, Wiegand, Surface mount, 9500 Templates, Silver

Product description

The ACL800SUW-BCMF is a Wiegand biometric and Mifare reader for access control applications with programmable Wiegand output. It offers storage of up to 9500 fingerprints, it reads Mifare Classic 1K & 4K, Ultralight, Desfire cards/tags and has a programmable Wiegand Output (24 to 80 bits). Configuration of the readers and fingerprint enrollment is done through the ACL800 BioManager Software.

The ACL800 range


The current ACL800 range is over 10 years old and is due for a refresh. The ACL800 range that consisted out of access readers, keypad readers and request-to-exit sensitive pushbuttons, has been extended with Biometric readers. There are two models, being the swipe and the touch capacitive biometric sensors. They are available in any combination of biometric swipe / touch capacitive, swipe / touch capacitive + keypad, swipe / touch capacitive + proximity reader, swipe / touch capacitive + Mifare reader.

Wiegand range

The Wiegand devices are ideal to be networked by using the TCP / IP to RS485 converter ACL800FL-CONV-W. Up to 31 Wiegand devices can be daisychained over RS485 and are managed by the ACL800 BioManager. When you need more devices, then simply add another converter. The access rights can be uploaded from the ACL800 BioManager to all the Wiegand devices connected to the converter. You have the option to either store the fingerprint templates in the reader or on the credential for privacy reasons.

ACL800 BioManager

Fingerprint and reader management software for biometric readers when used with third party access control systems. Fingerprint enrollment is done from any networked biometric reader or from a USB desktop enrollment unit. The fingerprints could be sent to one or all biometric readers in the network. ACL800 BioManager is a free application and also manages the access levels.
Compatible with : Windows 7, Windows 8 and Windows 10.

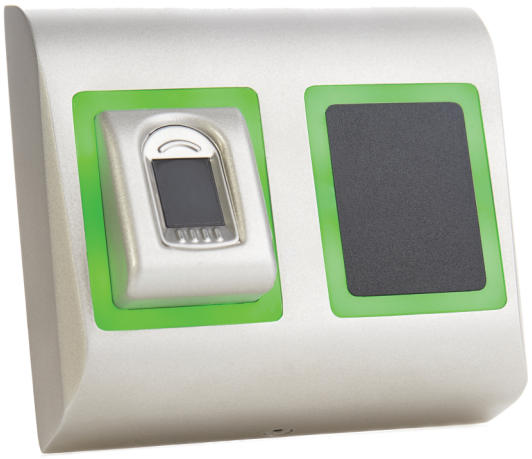

Details

- Indoor/outdoor
- Dust proof and water-resistant (IP65)
- Attractive and timeless design
- Includes a buzzer
- Tri-color LED's
- Surface mount
- Backlight illumination
- Two-factor authentication
- Biometric fingerprint reader with Mifare card

ACL800SUW-BCMF-S

ACL800 Biometric Capacitive with MIFARE reader - Fingerprint, Wiegand, Surface mount, 9500 Templates, Silver

Technische specificaties

System

Reading distance	1.5 to 5.5cm
Max. reader distance to panel	50 m
RTE (Request To Exit)	No
CSN (Card Serial Number)	Yes
Custom data model	No
No. of LEDs	3
No. of covers included	1
Language installation manual	English

Technology

Reader type	Biométrico, Tarjeta Inteligente
Reader operating-transmitting frequency	13,56 MHz
Supported technology 13.56 MHz	MIFARE Classic (CSN), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Ultralight (CSN)
Mifare type	ISO14443A
No. of Mifare bytes CSN	4 Byte (S50), 7 Byte (S70)
Read write	No
SAM module embedded	No

Biometric

Biometric type	Huella digital
Biometric sensor type	Capacitivo
Biometric template storage size	up to 9500 fingerprints

Interface & connections

Interface	Wiegand
Connector type	Svinesvans
Pigtail length	100 cm

Tamper type

Pry-off tamper	No
Opening tamper	Yes

Operation

Stand-alone	No
PIN keypad	No

Support

Language installation manual	English

Electrical

Power supply type	VCC
Power supply value	9 to 14 VDC
Current consumption	160 mA at 12 VDC max

Physical

Physical dimensions	100 x 94 x 30 mm
Net weight	300 g
Shipping weight	310 g
Colour	Sølv
Material	Støbt aluminium
Form factor	Overdimensioneret
Mounting type	Montaje en Superficie

Environmental

Environment	Indendør, Udendørs
Operating temperature	-20 to +50°C
Storage temperature	-20 to +50°C
IP rating	65

Regulatory

Compliancy	CE, RoHS

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57